

Connecting to TV-SET with 3,5mm AV connector



* HDMI cable included in the box * 3,5mm AV cable not included in the box


IPTV SET TOP BOX INSTRUCTION MANUAL

TH100

Technical Specifications

.....

Interfaces:	Audio output HDMI 1.4-output, Composite + stereo A/V output, Ethernet 100 Mb/s, 2 x USB 2.0, WiFi (optional- through USB)
Media content source:	Local network PC or NAS, Stream media protocols (RTSP, RTP, UDP, IGMP, HTTP), USB-device
Audio & Video:	Video modes: 1080i, 1080p, 720p, 576p, 480p, PAL, NTSC Video codecs: MPEG1/2, H.265, H.264, MPEG4 part 2, XviD; HD video supporting Audio codecs: MPEG-1 layer I/II, MPEG-2 layer MPEG-2 layer III (mp3)
LED indicators:	Power; Remote Activity; LAN Link/Activity
Power consumption	2,5 Watts (Max), 200mA/12V
Power supply	External power adapter DC 12V
Environment:	Operating Temperature: 10°C~30°C Operating Humidity : 10%~80% (Non-Condensing)
Dimensions:	130mm(L) x 88mm(W) x 28mm(H)

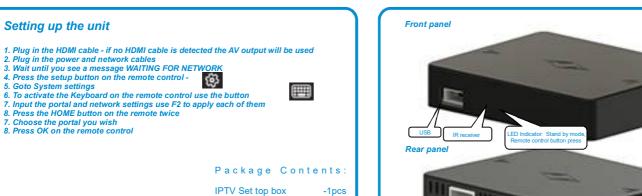

-1pcs

-1pcs

-2pcs

-1pcs

-1pcs

USING THE REMOTE CONTROL UNIT

The remote control included into the package needs two AAA batteries (also included into the package*) to operate

Inserting the batteries

TROUBLESHOOTING

plugged in when you power on the device.



Remove battery



Replace the

ittery cover

Insert two AAA

1. Your STB is not supported / Your STB is blocked SOL: Check with your service provider 2. Nothing comes out on the screen SOL: The HDMI port has an auto-detect function. Make sure it is

Programmable Remote Control Unit

Th100 package includes a remote control with a group of five programmable buttons, marked with blue color which may be used to control other devices.

To program the buttons:

External Power Supply

IR Remote control

Instruction manual

AAA batteries

HMDI cable

Press and hold the blue "On/Off" and the "A/V" buttons at the same time until you note the red light becomes brighter. This means the remote is ready to learn. 1. Choose the button you want to "teach" a new code to - the

- red light will start to blink. 2. Place the infrared outputs of the two remotes against each
- Prace the marked outputs of the two remotes against each other and press the button on the remote control of the other device that you wish to copy and hold for 2 seconds.
 You will see the red light blink a couple of times quickly, this means the button has been programmed.
 Repeat steps 1 to 3 to choose and program the other buttons of the remote control
- 5. Press and hold the blue "On/Off" and the "A/V" buttons at
- the same time until you notice the red light turns off to save the programmed data.

