IPTV SET TOP BOX
INSTRUCTION MANUAL

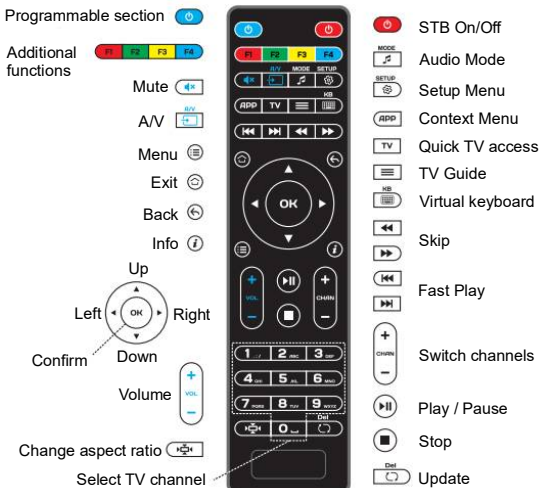|			
Programmable section	⏻	⏻ STB On/Off	
Additional functions	F1 F2 F3 F4	🎵 Audio Mode	MODE
Mute	🔇	⚙ Setup Menu	SETUP
A/V		APP Context Menu	APP
Menu	≣	TV Quick TV access	TV
Exit	◎	≣ TV Guide	
Back	←	▦ Virtual keyboard	KB
Info	ⓘ	◀◀ Skip	
Up		▶▶	
Left ◀ OK ▶ Right		◀◀ Fast Play	
Confirm Down		▶▶	
Volume	+ VOL −	+ CHAN − Switch channels	
Change aspect ratio	⊡	▶‖ Play / Pause	
Select TV channel		■ Stop	
		⟲ Update	Del

Programmable buttons are marked with blue color which may be used to control other devices.

To program the buttons:
Press and hold the blue "On/Off" and the "A/V" buttons at the same time until you notice the red light becomes brighter. This means the remote is ready to learn.
1. Choose the button you want to "teach" a new code to - the red light will start to blink.
2. Place the infrared outputs of the two remotes against each other and press the button on the remote control of the other device that you wish to copy and hold for 2 seconds.
3. You will see the red light blink a couple of times quickly, this means the button has been programmed.
4. Repeat steps 1 to 3 to choose and program the other buttons of the remote control
5. Press and hold the blue "On/Off" and the "A/V" buttons at the same time until you notice the red light turns off to save the programmed data.

Setting up the unit

1. **Plug in the HDMI cable - if no HDMI cable is detected the AV output will be used**
2. **Plug in the power and network cables**
3. **Wait until you see a message WAITING FOR NETWORK**
4. **Press the setup button on the remote control -** ⚙
5. **Goto System settings**
6. **To activate the Keyboard on the remote control use the button** ▦
7. **Input the portal and network settings use F2 to apply each of them**
8. **Press the HOME button on the remote twice**
7. **Choose the portal you wish**
8. **Press OK on the remote control**

Package Contents:

IPTV Set top box	-1pcs
External Power Supply	-1pcs
IR Remote control	-1pcs
AAA batteries	-2pcs
Instruction manual	-1pcs
HMDI cable	-1pcs